

Model 5241 Power Amplifier

DESCRIPTION


The Model 5241 is a voltage-controlled power amplifier designed exclusively for Magtrol's Model HD-825 Hysteresis Dynamometer. Because of its double braking system, the HD-825 requires more than 4 amps of power in order to reach full torque. The 5241 (which can provide up to 5 amps of output current) is necessary in order to amplify the power between a 6200 or DSP6001 Controller (which both have a maximum current output of 1 amp) and the HD-825 Dynamometer.

ORDERING INFORMATION

If the HD-825 is purchased without a dynamometer controller, please inform Magtrol of your controller model—as it may be necessary to modify your existing controller so that it functions properly with the 5241 Power Amplifier.

SPECIFICATIONS

ELECTRICAL CHARACTERISTICS	
Current Output	0 to 5 A DC
Control Input	0 to +3 V DC or 0 to -10 V DC
Fuses (5 × 20 mm)	Brake: UL/CSA 6.3 A 125 V SB IEC 5 A 250 V T
	Power (120 V): UL/CSA 3 A 250 V SB Power (240 V): IEC 1.25 A 250 V T
Power Requirements	330 VA
Voltage Requirements	120/240 V 60/50 Hz

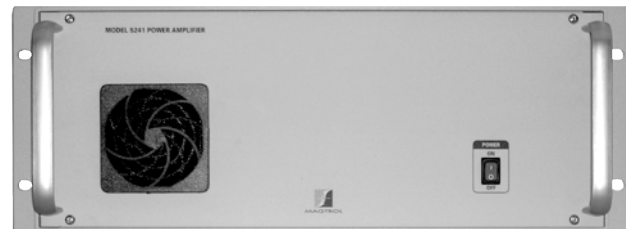


front panel



rear panel

DIMENSIONS		
Width	19.00 in	483 mm
Height	5.20 in	133 mm
Depth with handles	14.74 in	375 mm
Weight	29.66 lb	13.45 kg

SYSTEM CONFIGURATION

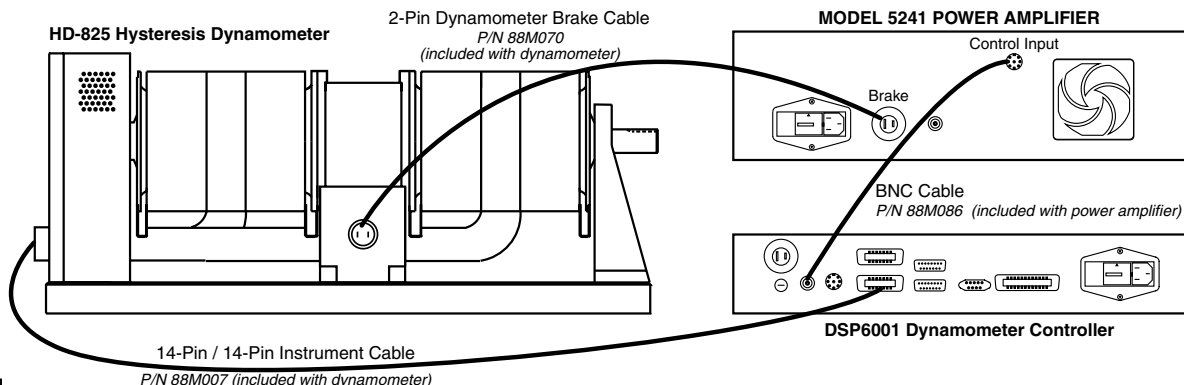

www.magtrol.com

MAGTROL INC
70 Gardenville Parkway
Buffalo, New York 14224 USA
Phone: +1 716 668 5555
Fax: +1 716 668 8705
E-mail: magtrol@magtrol.com

MAGTROL SA
Centre technologique Montena
1728 Rossens/Fribourg, Switzerland
Phone: +41 (0)26 407 3000
Fax: +41 (0)26 407 3001
E-mail: magtrol@magtrol.ch

Subsidiaries in:
Great Britain
Germany • France
China • India
Worldwide Network
of Sales Agents

